


Hickok Model 6000A Tube Tester 300B/845 Special Adapters



UX-4 (4-pin) to 8-pin Octal socket
(300B 4-pin to 8-pin octal)

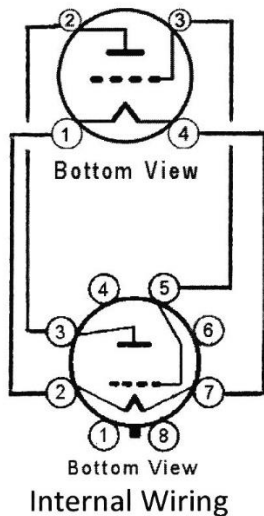

Jumbo (4-pin)
to UX-4 4-pin Socket
(845 to 300B)

† Hickok Model 6000A Tube Tester Special Settings

Tube Type	Filament	Selections	Bias	Shunt	Funct.	Mut. Cond.	Notes
300B	5.0	HS-5300-0	64	86	F	5000	Directly Heated Power Triode
‡ 845	10.0	HS-5300-0	47	86	F	3400	Directly Heated Power Triode

† Special settings determined using known new (or NOS) tubes using factory test results and datasheet specifications. Test using the **0-6000 scale**.

‡ 845 settings are based on using the *[Jumbo 4-pin to UX-4 4-pin socket adapter]* together with the *[UX-4 to octal adapter]* required for the Hickok 6000A tube tester.

Fresh new 845s test good between 3000-umhos to 4000-umhos which is at the lower left-end of the 0-6000scale.